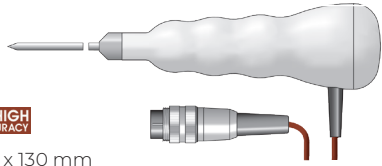
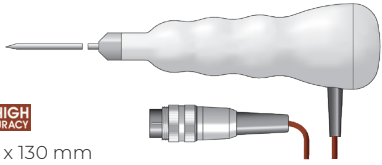
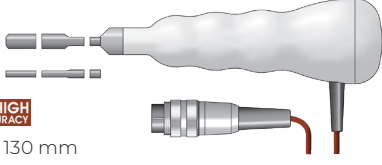

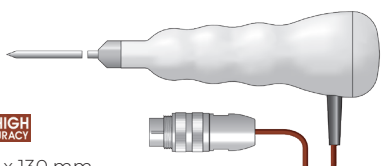



LUMBERG CONNECTOR TYPE T THERMOCOUPLE PROBES

		Order code
<p>PENETRATION PROBE</p>  <p>A HIGH ACCURACY Ø3.3 x 130 mm</p>	<p>This stainless steel penetration probe is strong, versatile and incorporates a heavy-duty, ribbed, polypropylene handle with a white end cap. Ideal for measuring liquids, semi-solids and granular materials.</p> <ul style="list-style-type: none"> • Response time less than 5 seconds • Probe temperature range -75 to 250 °C 	177-166
<p>FAST RESPONSE PROBE</p>  <p>A HIGH ACCURACY Ø2.6 x 130 mm</p>	<p>This stainless steel, fast response, needle penetration probe incorporates a heavy-duty ribbed, polypropylene handle. Suitable for liquids and soft semi-solid materials including fish, fruit and other soft or delicate materials.</p> <ul style="list-style-type: none"> • Response time less than 4 seconds • Probe temperature range -75 to 250 °C 	177-100 4099012
<p>RIGID BETWEEN PACK PROBE</p>  <p>A HIGH ACCURACY Ø6 x 130 mm</p>	<p>This rigid, stainless steel, between pack probe is strong, versatile and incorporates a heavy-duty ribbed, polypropylene handle. The probe has been specifically designed to measure between packs or boxes of produce.</p> <ul style="list-style-type: none"> • Response time less than 3 seconds • Probe temperature range -75 to 250 °C 	177-060
<p>AIR OR GAS WIRE PROBE</p>  <p>A HIGH ACCURACY Ø2.4 x 1000 mm PTFE lead</p>	<p>This fast response, air or gas wire probe is ideal for measuring air temperatures in fridges, freezers, chill cabinets and similar. Supplied complete with a one metre PTFE lead.</p> <ul style="list-style-type: none"> • Response time less than 2 seconds • Probe temperature range -75 to 250 °C 	177-372

Please note: the above type T thermocouple probes are suitable for use with the Therna 22 & Therna 22 Plus

WATERPROOF TYPE T THERMOCOUPLE PROBES

		Order code
<p>PENETRATION PROBE</p>  <p>A HIGH ACCURACY Ø3.3 x 130 mm</p>	<p>This waterproof, stainless steel, penetration probe with Lumberg connector is strong, versatile and incorporates a heavy-duty, ribbed, polypropylene handle with a white end cap. Ideal for measuring liquids, semi-solids and granular materials.</p> <ul style="list-style-type: none"> • Response time less than 5 seconds • Probe temperature range -75 to 250 °C 	177-266
<p>PENETRATION PROBE</p>  <p>A HIGH ACCURACY Ø3.3 x 100 mm</p>	<p>This waterproof, stainless steel, plug-mounted probe with Lumberg connector is strong, versatile and ideal for measuring liquids, semi-solids and granular materials.</p> <ul style="list-style-type: none"> • Response time less than 4 seconds • Probe temperature range -75 to 250 °C 	177-200 4099014

Please note: the above type T thermocouple probes (177-266 & 177-200) are suitable for use with the Therna 22 Plus and are waterproof to IP67 when connected to an instrument