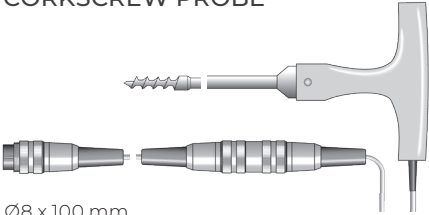



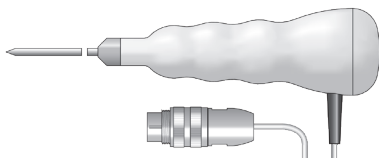



# NTC THERMISTOR PROBES WITH LUMBERG CONNECTOR

		Order code
<p><b>CORKSCREW PROBE</b></p>  <p>Ø8 x 100 mm</p>	<p>This frozen food probe incorporates a heavy-duty T-shaped, polypropylene handle and a corkscrew design sensing tip. Ideal for measuring deep frozen foods or other frozen materials. Supplied with a one metre PVC detachable lead.</p> <ul style="list-style-type: none"> <li>• Response time less than 9 seconds</li> <li>• Probe temperature range -40 to 150 °C</li> </ul>	<p>170-175      4098978</p>
<p><b>FOOD SIMULANT PROBE</b></p>  <p>9 x 100 x 100 mm</p>	<p>This polypropylene probe is designed for use in food storage, chill cabinets and refrigeration where simulation of food temperature is required. The probe incorporates a one metre PUR /PVC lead and compatible Lumberg connector.</p> <ul style="list-style-type: none"> <li>• Probe temperature range -20 to 100 °C</li> </ul>	<p>170-350      4099123</p>
<p><b>AIR OR GAS WIRE PROBE</b></p>  <p>Ø3.7 x 30 mm with 1000 mm FEP lead</p>	<p>This fast response, air or gas wire probe is ideal for measuring air temperature in chill cabinets, fridges, freezers, offices, storage areas and similar. Supplied with a one metre FEP lead.</p> <ul style="list-style-type: none"> <li>• Response time less than 2 seconds</li> <li>• Probe temperature range -40 to 150 °C</li> </ul>	<p>170-372      4099128</p>
<p><b>FOIL BETWEEN PACK PROBE</b></p>  <p>40 x 50 mm with 1000 mm FEP lead</p>	<p>This easy-to-use, flexible, fast response, foil between pack probe has been designed to measure between packs or boxes of produce in a variety of applications.</p> <ul style="list-style-type: none"> <li>• Response time less than 3 seconds</li> <li>• Probe temperature range -20 to 75 °C</li> </ul>	<p>170-090      4099124</p>

Please note: the above NTC thermistor probes are suitable for use with the Therma 20, 22, 20 Plus, 22 Plus & 8100 Plus

# WATERPROOF NTC THERMISTOR PROBES

		Order code
<p><b>PENETRATION PROBE</b></p>  <p>Ø3.3 x 130 mm</p>	<p>This waterproof, stainless steel penetration probe with Lumberg connector is versatile, strong and incorporates a heavy-duty, ribbed, polypropylene handle with a white end cap. Ideal for measuring liquids, semi-solids and granular materials.</p> <ul style="list-style-type: none"> <li>• Response time less than 5 seconds</li> <li>• Probe temperature range -40 to 150 °C</li> </ul>	<p>174-266</p>
<p><b>PENETRATION PROBE</b></p>  <p>Ø3.3 x 100 mm</p>	<p>This waterproof, stainless steel plug-mounted penetration probe with Lumberg connector is versatile and strong. Ideal for measuring liquids, semi-solids and granular materials in a wide variety of applications.</p> <ul style="list-style-type: none"> <li>• Response time less than 4 seconds</li> <li>• Probe temperature range -40 to 150 °C</li> </ul>	<p>172-000      4099121</p>

Please note: the above NTC thermistor probes (174-266 & 172-000) are suitable for use with the Therma 20 Plus, 22 Plus & 8100 Plus and are waterproof to IP67 when connected to an instrument