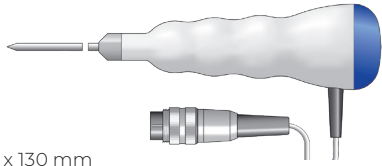
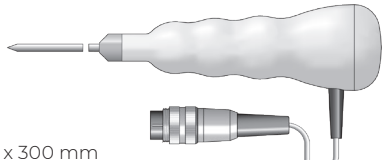
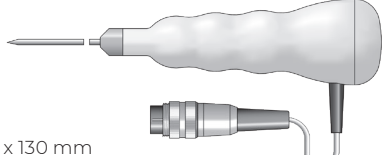
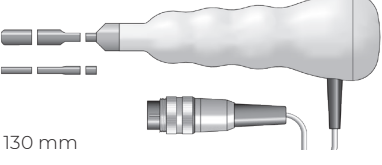
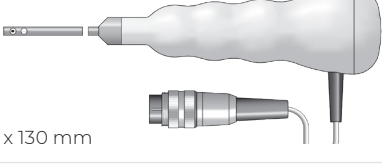
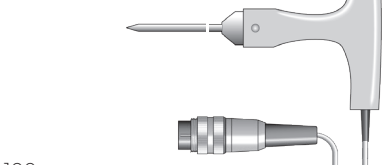
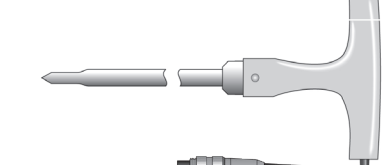


# NTC THERMISTOR PROBES WITH LUMBERG CONNECTOR

			Order code
<p><b>PENETRATION PROBE</b></p>  <p>Ø3.3 x 130 mm</p>	<p>This stainless steel penetration probe is strong, versatile and incorporates a heavy-duty, ribbed, polypropylene handle with a colour-coded end cap. Ideal for measuring liquids, semi-solids and granular materials.</p> <ul style="list-style-type: none"> <li>● Response time less than 5 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>	<ul style="list-style-type: none"> <li>● 174-161</li> <li>● 174-162</li> <li>● 174-164</li> <li>● 174-165</li> <li>● 174-166</li> <li>● 174-167</li> </ul>	<p>4099120BL</p> <p>4099116</p> <p>4099120Y</p>
<p><b>PENETRATION PROBE</b></p>  <p>Ø3.3 x 300 mm</p>	<p>This extended, stainless steel penetration probe is strong, versatile and incorporates a heavy-duty, ribbed, polypropylene handle with a white end cap. Ideal for measuring liquids, semi-solids and granular materials.</p> <ul style="list-style-type: none"> <li>● Response time less than 5 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>		<p>174-168</p> <p>4099117</p>
<p><b>FAST RESPONSE PROBE</b></p>  <p>Ø2.6 x 130 mm</p>	<p>This stainless steel, fast response, needle penetration probe incorporates a heavy-duty ribbed, polypropylene handle. The probe is suitable for liquids and soft semi-solids including fish, fruit and other delicate materials.</p> <ul style="list-style-type: none"> <li>● Response time less than 4 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>		<p>174-100</p> <p>4099129</p>
<p><b>RIGID BETWEEN PACK PROBE</b></p>  <p>Ø6 x 130 mm</p>	<p>This rigid, stainless steel between pack probe is strong, versatile and incorporates a heavy-duty ribbed, polypropylene handle. The probe has been specifically designed to measure between packs or boxes of produce.</p> <ul style="list-style-type: none"> <li>● Response time less than 3 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>		<p>174-060</p> <p>4099109</p>
<p><b>AIR OR GAS PROBE</b></p>  <p>Ø3.3 x 130 mm</p>	<p>This stainless steel, fast response air or gas probe incorporates a heavy-duty ribbed, polypropylene handle. The probe is ideal for measuring air temperature in refrigeration units, storage areas and other similar applications.</p> <ul style="list-style-type: none"> <li>● Response time less than 2 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>		<p>174-300</p> <p>4099111</p>
<p><b>PENETRATION PROBE</b></p>  <p>Ø4 x 100 mm</p>	<p>This robust, stainless steel penetration probe incorporates a heavy-duty, T-shaped polypropylene handle. The strong, durable probe is suitable for a wide variety of heavy-duty, general purpose industrial or food processing applications.</p> <ul style="list-style-type: none"> <li>● Response time less than 4 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>		<p>170-169</p> <p>4099118</p>
<p><b>REDUCED TIP PROBE</b></p>  <p>Ø9.5 x 1000 mm</p>	<p>This extended, robust Ø9.5 mm stainless steel reinforced probe incorporates a heavy-duty, T-shaped polypropylene handle and a reduced sensing tip (Ø6.35 x 25 mm) for faster response. Ideal for a wide variety of heavy-duty, general purpose industrial or food processing applications.</p> <ul style="list-style-type: none"> <li>● Response time less than 15 seconds</li> <li>● Probe temperature range -40 to 150 °C</li> </ul>		<p>170-136</p>

Please note: the above NTC thermistor probes are suitable for use with the Therma 20, 22, 20 Plus, 22 Plus & 8100 Plus