

RAYTEMP® 3 INFRARED THERMOMETER

- High accuracy over the critical food range
- Circular laser for precise targeting
- Temperature range -60 to 500 °C
- Compact, lightweight & easy-to-use



The RayTemp 3 infrared thermometer is compact, lightweight and easy-to-use. Simply aim and pull the trigger to display the temperature of the item being measured. In addition the LCD will display the maximum temperature.

The instrument measures temperature over the range of -60 to 500 °C with an assured accuracy of ± 1 °C over the critical food range of 0 to 65 °C, outside of this range ± 2 °C or ± 2 % whichever is greater, of reading in an ambient temperature of between 15 °C and 25 °C, with a repeatability of ± 1 °C of reading.

Incorporating a clear, easy-to-read, LCD display with low battery, laser and backlight indication and an auto-power-off facility that turns the instrument off after 15 seconds, maximising battery life. The RayTemp 3 thermometer is ideal for measuring food surface temperatures, eliminating the need to touch or contaminate the food you are measuring, avoiding the risk of cross-contamination. The unit can be used by anyone, as there is no need to focus or adjust the instrument.


Each RayTemp 3 thermometer features a single push button, allowing the user to select °C or °F. The thermometer also incorporates a circular laser with centre dot indicator, which allows you to precisely target the diameter of the area to be measured. As you move closer or further from the target the laser circle changes diameter. The unit incorporates a 12:1 optic ratio (target distance/diameter ratio) and a fixed emissivity of 0.97 making it more suitable for chilled and frozen foods, although this thermometer can be used for a wide range of other applications.

INFRARED



OPTIONAL ACCESSORIES:

- Protective nylon pouch with belt strap (830-040)
- ABS carrying case - ideal for transporting and securely storing the RayTemp 3 thermometer (834-740)

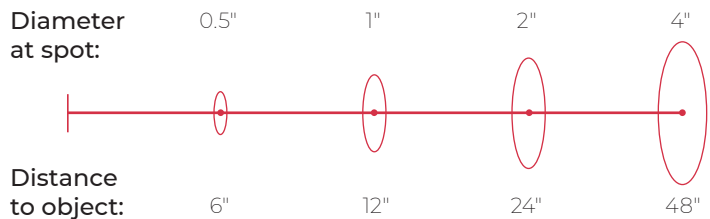

● Comparator (814-132)



Specification	RayTemp 3
Range	-60 to 500 °C
Resolution	0.1 °C/ °F (-9.9 to 199.9 °C) or 1 °C
Accuracy	± 1 °C (0 to 65 °C) otherwise ± 2 °C or ± 2 % whichever is greater
Field of view	Target ratio 12:1
Emissivity	0.97 fixed
Battery & life	2 x 1.5 volt AAA - 140 hours continuous use
Display	Custom LCD
Dimensions	40 x 66 x 155 mm
Weight	180 grams

Order code	Description	
814-040	RayTemp 3	4099580
830-040	Protective nylon pouch	4099578
834-740	ABS carrying case	4099585
814-132	Comparator	4099600