




IN-LINE CHECK VALVES Cast Brass Check Valves

These cast-brass check valves have been specifically designed for installation into air compressor discharge lines. Extra-heavy walled cast brass bodies, glass-filled fluropolymer poppets, and stainless springs resist corrosion and insure long life. A plugged, 1/8" NTP unloader port is standard.

- 250 PSI (1725 kPa) maximum pressure.
- 232°C maximum temperature.

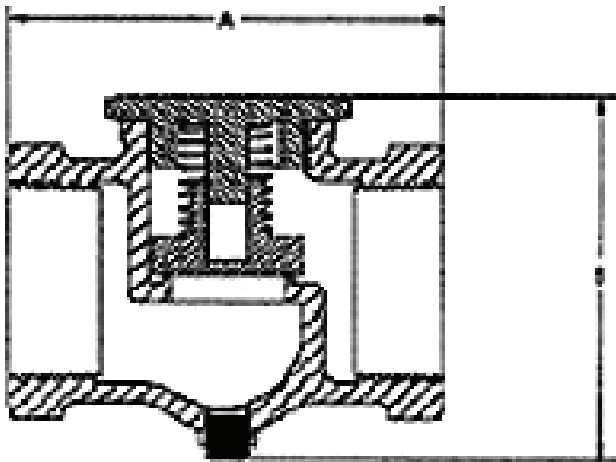

Model	Size	Dimensions (mm)			Max Flow Rate SCFM	Weight (gms)	Part Number
		A	B	Width			
CB13	1/8" NPT	44.4	41.3	21.4	12	170	4017750
CB38	3/8" NPT	55.5	47.6	47.6	22	255	4017850
CB50	1/2" NPT	63.5	54.0	54.0	38	370	4017900
CB75	3/4" NPT	73.0	63.5	63.5	60	570	4017950
CB10	1" NPT	88.9	73.0	73.0	115	800	4018000
CB12	1-1/4" NPT	98.4	79.4	54.0	180	1130	4018050
CB15	1-1/2" NPT	104.7	87.3	57.1	180	1250	4018052
CB20	2" NPT	114.3	98.4	69.8	220	1700	4018054

The data provided above is for information purposes only and no warranty of accuracy or reliability is given.
Ross Brown Sales Pty Limited reserves the right to change or modify this data without prior notice.