



Pilot Valves

Model "P25"







The P25 Pilot Valve is an industry standard. Details of construction include a precision-machined, forged brass body, brass adjustment screws, and stainless steel ball and spring.

Valve cut-in and cut-out pressures are factory set per customer specifications. If no specifications are given, valve is set at standard setting of 95-115 PSI (655-793 kPa). Valve is also field adjustable.

Valve includes a mounting boss, tapped with a 3/8 - 16 UNC thread, a 1/4" NPT inlet and a 1/8" NPT outlet. Valve comes standard with unloading sleeve for gas engine warm up. Options include a toggle for one-hand unloading, a lockout thumbscrew for dual control systems, and a 1/4" NPT nipple installed into the inlet port. Maximum cut-out pressure 250 psi (1725 kPa), minimum cut-out pressure 60 psi (415 kPa). Max temperature is 175°C.

Model	Pressure		Weight (gms)	Part Number
	Cut-in	Cut-out		
P25	95 psi	115 psi	185	4010000

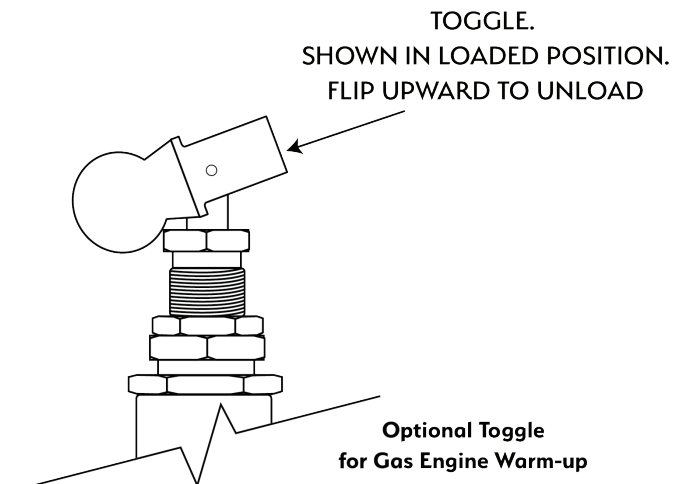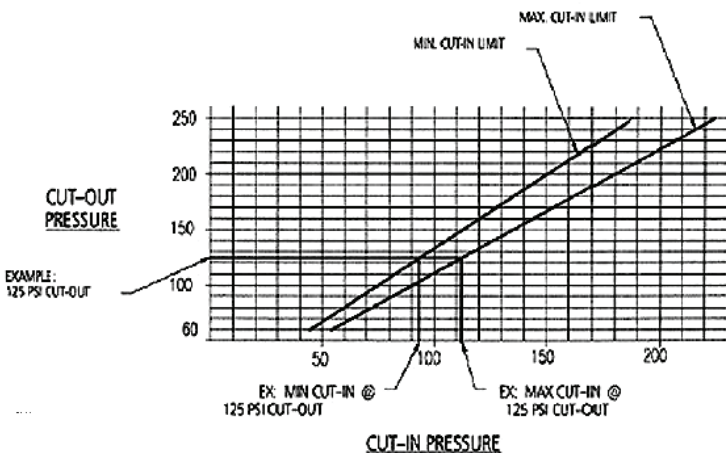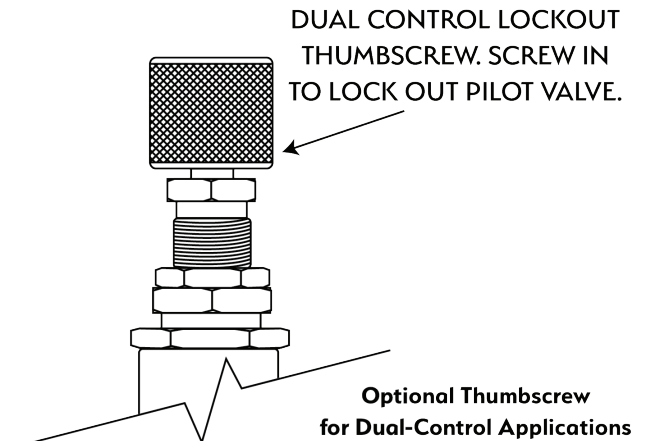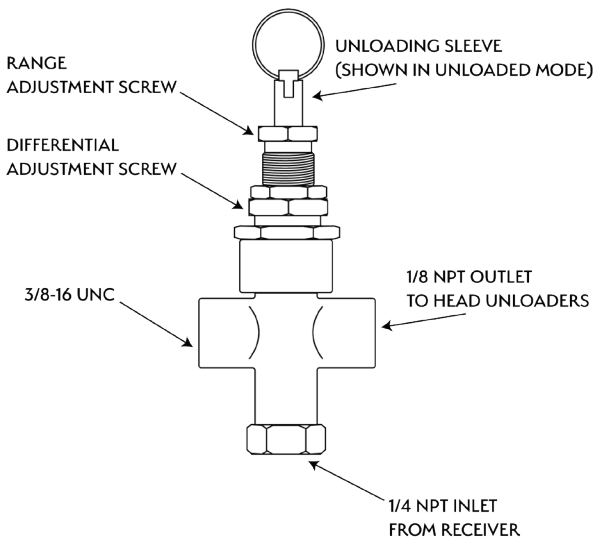

The data provided above is for information purposes only and no warranty of accuracy or reliability is given. Ross Brown Sales Pty Limited reserves the right to change or modify this data without prior notice.